


DANOPANEL GLOBE - PERFORATION DATA


PERFORATION DETAILS

Perforation type	Globe - 6 mm round holes
Perforation percentage	10,2 %
Perforation pattern	G1

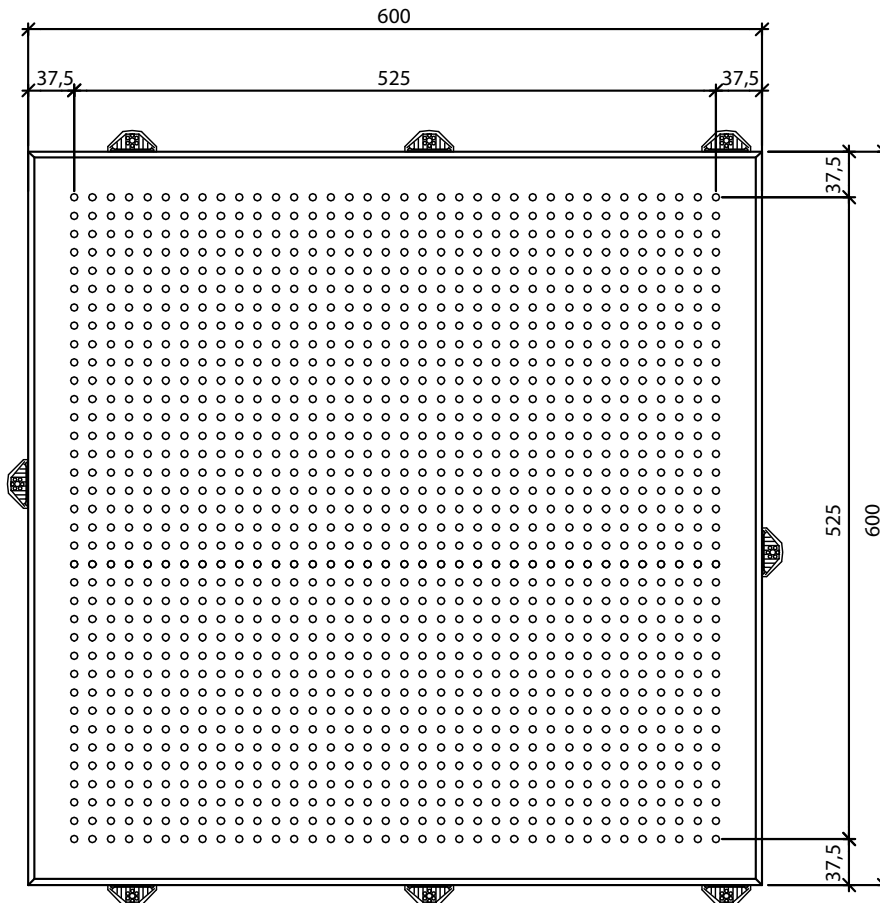

ABSORPTION COEFFICIENTS

Frekvens (Hz)	125	250	500	1000	2000	4000
α_p	0,55	0,75	0,75	0,60	0,60	0,55

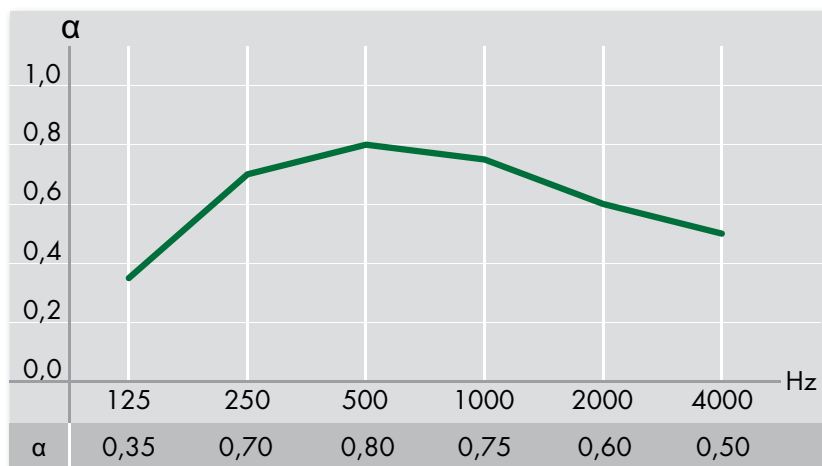


At 200 mm and with 50 mm mineral wool

DANOPANEL GLOBE - PERFORATION DATA

This overview shows the special perforation patterns, that Danopanel Globe is available with in 600 mm format. For more detailed drawings of a specific perforation pattern please contact our [local representative](#).


G2F




G2T




G3F



G3T



G4F




G4T



G2L




G4L2



G3L



G4T2



G4L

