


DANOPANEL MICRO - PERFORATION DATA


PERFORATION DETAILS

Perforation type	Micro - 3x3 mm square holes
Perforation percentage	10,2 %
Perforation pattern	M1

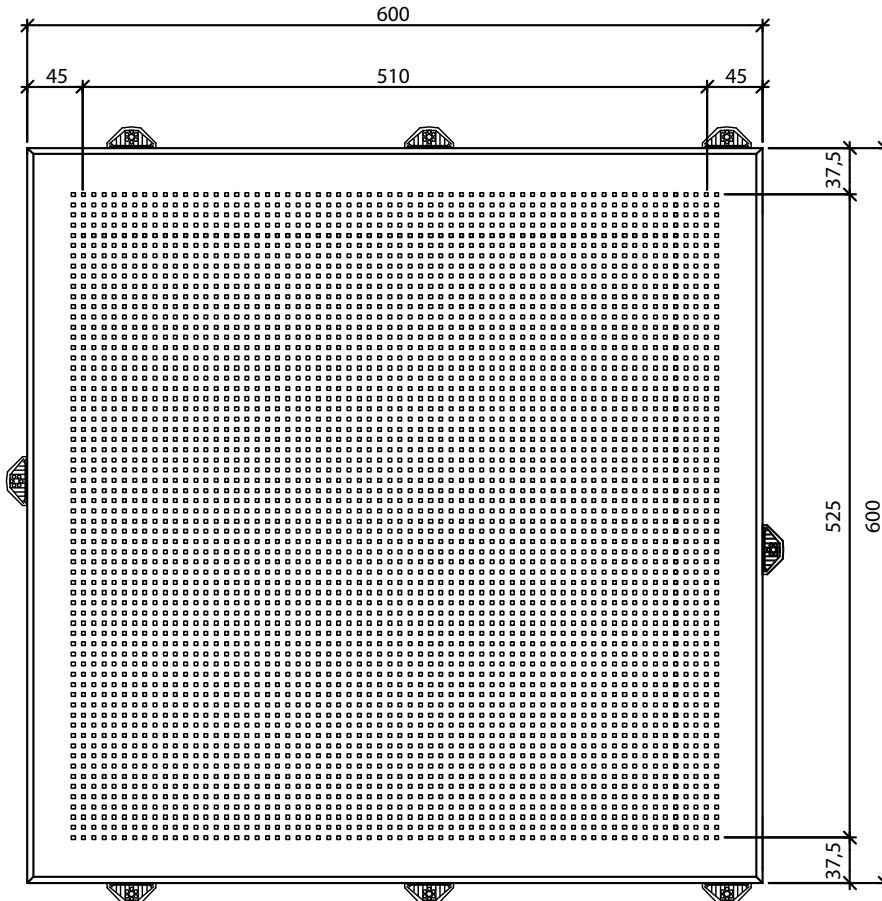

ABSORPTION COEFFICIENTS

Frequency (Hz)	125	250	500	1000	2000	4000
α_p	0,45	0,70	0,70	0,70	0,70	0,70

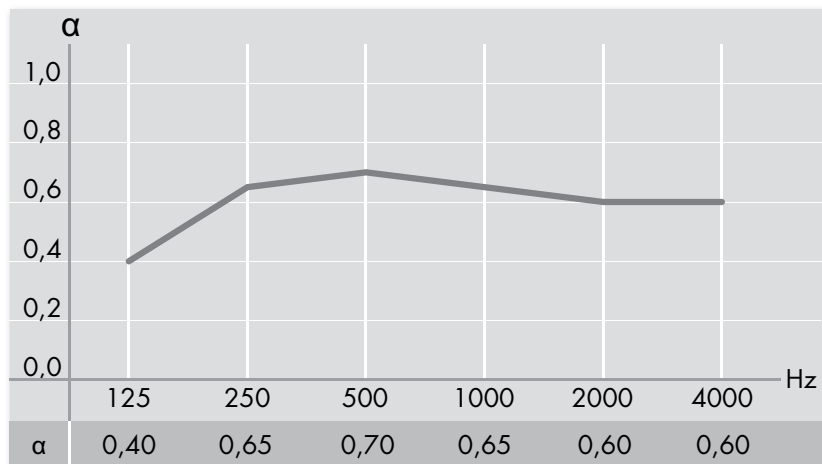


At 200 mm and with 50 mm mineral wool

DANOPANEL MICRO - PERFORATION DATA

This overview shows the special perforation patterns, that Danopanel Micro is available with in 600 mm format. For more detailed drawings of a specific perforation pattern please contact our [local representative](#).


M2F




M2T




M3F



M3T



M4F




M4T




M2L




M4L2



M3L



M4T2



M4L

