


DESIGNPANEL MICRO M1F 900


PERFORATION DETAILS

Perforation type	Micro - 3x3 mm square holes
Perforation percentage	9,8 %
Perforation pattern	M1F

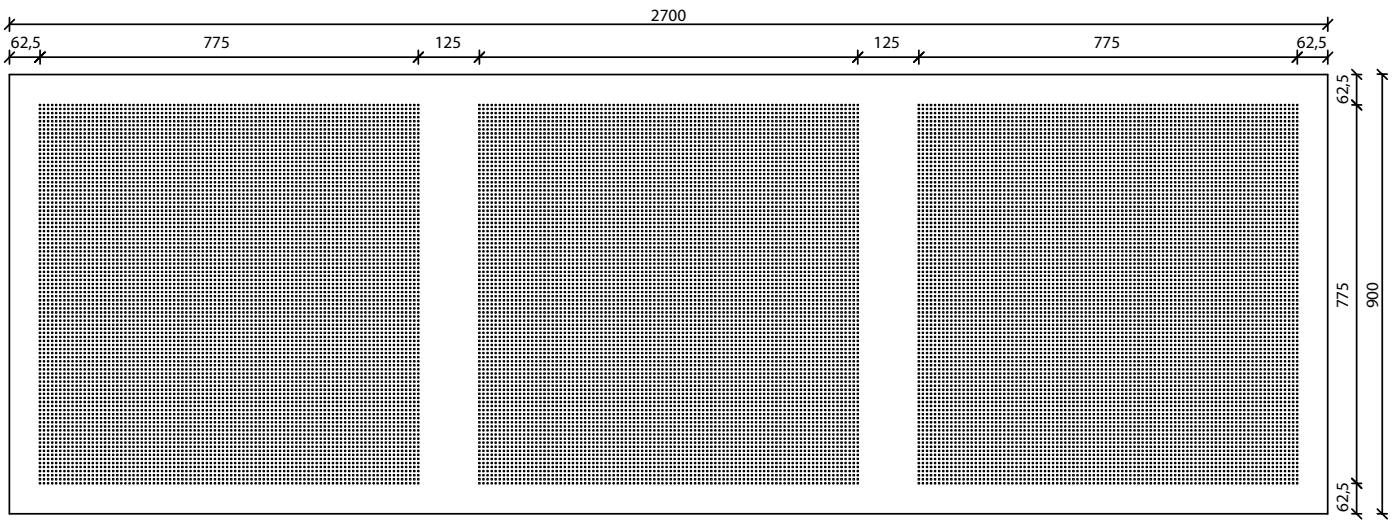

ABSORPTION COEFFICIENTS

Frequency (Hz)	125	250	500	1000	2000	4000
α_p	0,40	0,60	0,65	0,65	0,60	0,55

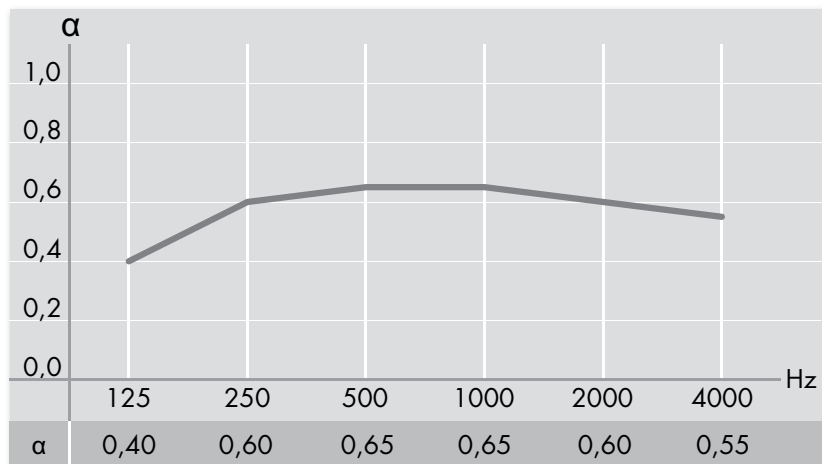


At 65 mm and with 50 mm mineral wool

DESIGNPANEL MICRO M2F 900


PERFORATION DETAILS

Perforation type	Micro - 3x3 mm square holes
Perforation percentage	7,1 %
Perforation pattern	M2F

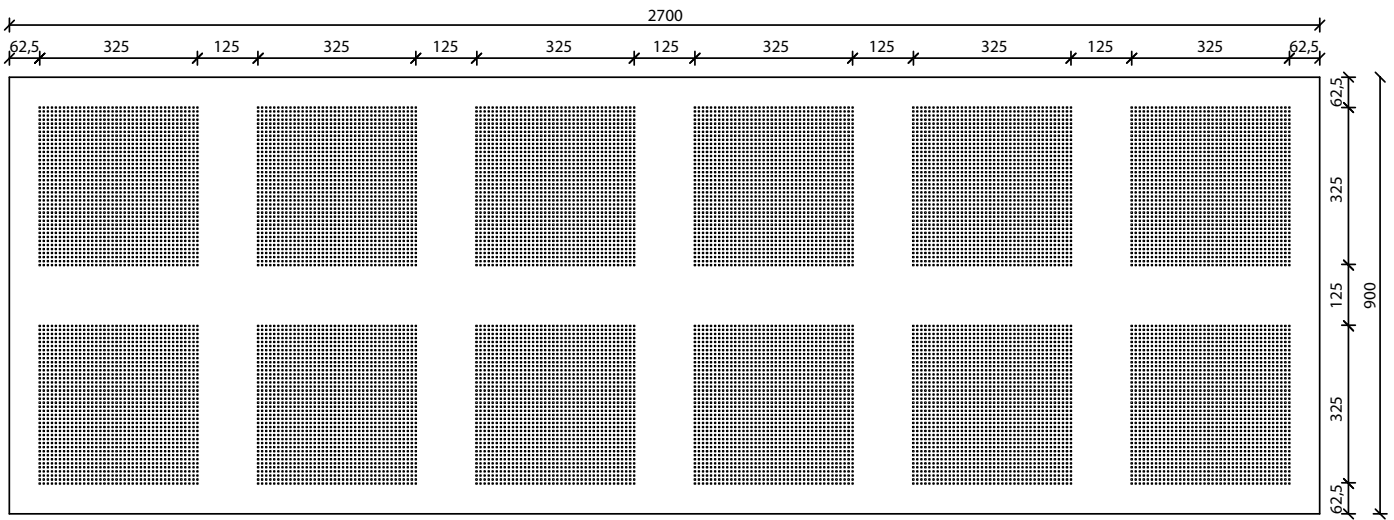

ABSORPTION COEFFICIENTS

Frequency (Hz)	125	250	500	1000	2000	4000
α_p	0,35	0,50	0,50	0,50	0,45	0,45

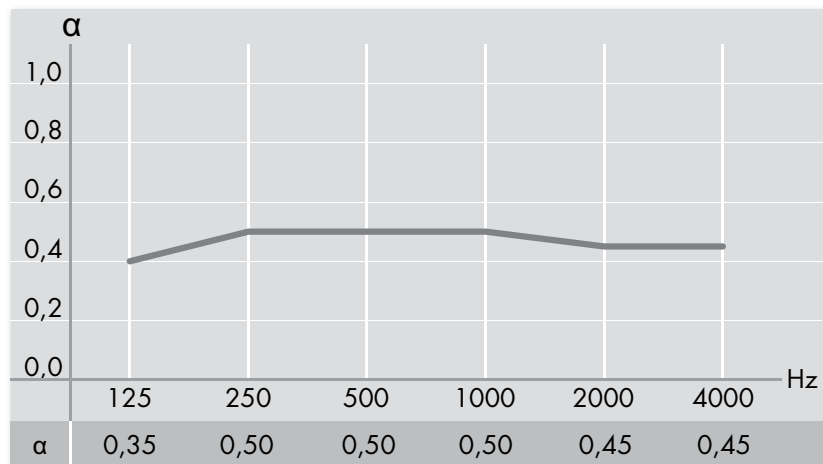


At 65 mm and with 50 mm mineral wool

DESIGNPANEL MICRO M2F 1200


PERFORATION DETAILS

Perforation type	Micro - 3x3 mm square holes
Perforation percentage	8,4 %
Perforation pattern	M2F

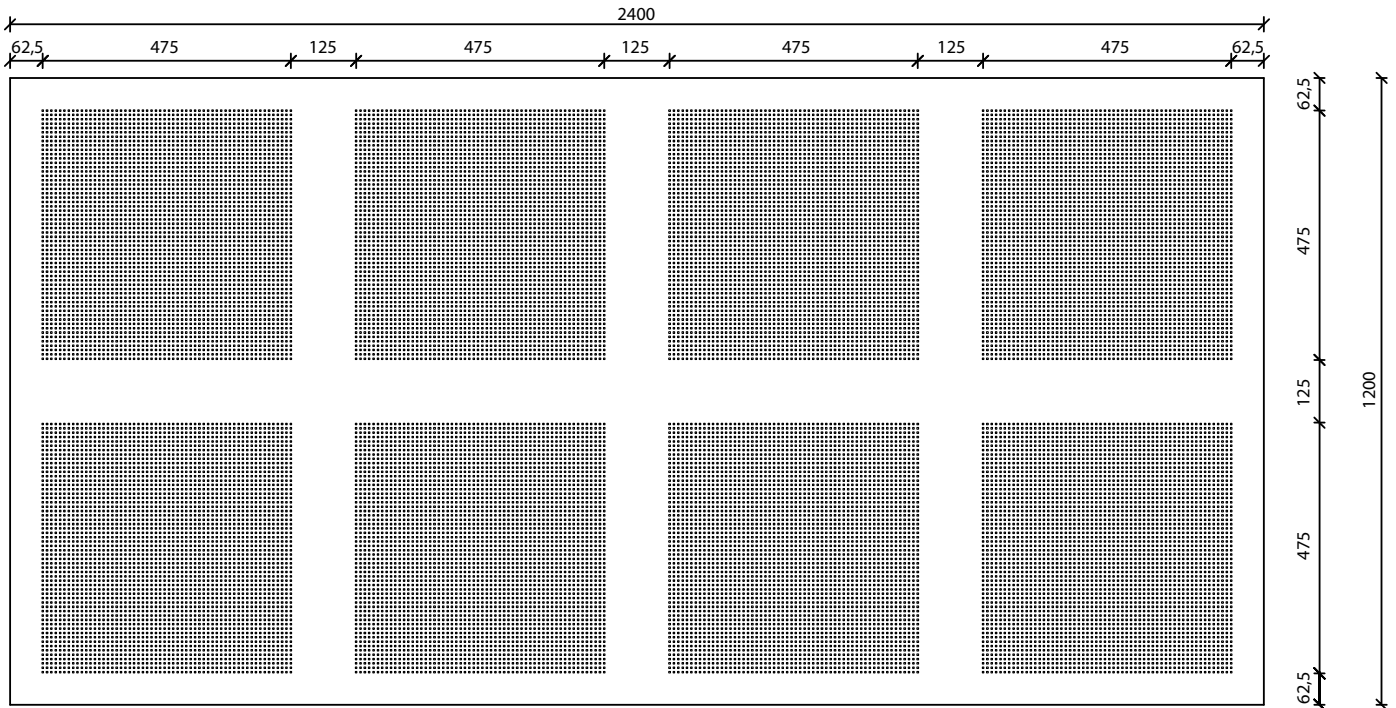

ABSORPTION COEFFICIENTS

Frequency (Hz)	125	250	500	1000	2000	4000
α_p	0,40	0,55	0,60	0,55	0,50	0,50

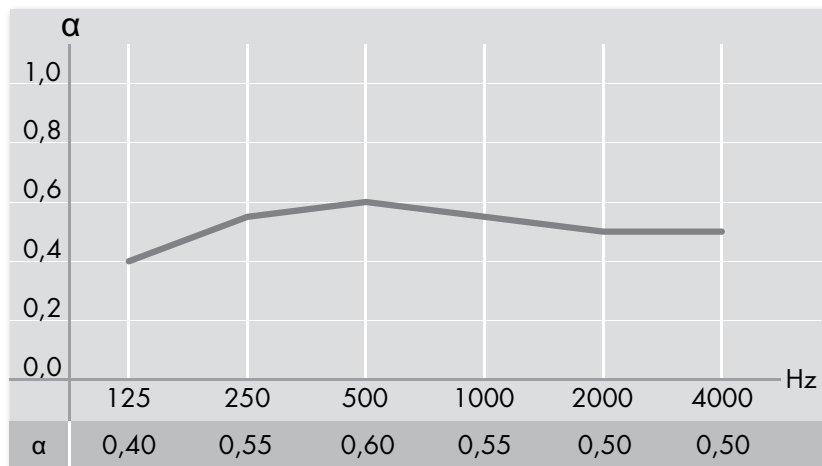

At 65 mm and with 50 mm mineral wool