

polyfon mesh™

OPEN CELL ACOUSTIC CEILING PANEL



TECHNICAL DATA SHEET BPIR - CLASS 1



polyfon mesh™

Open Cell Acoustic Ceiling Panel

Technical Data Sheet - BPIR Class 1

Polyfon Mesh™ is a perforated open cell ceiling panel designed to provide a contemporary industrial aesthetic when using standard two way exposed ceiling grid. Panels may be mixed and matched with other ceiling panel types for design effect or acoustic control. Available in diamond, square, hexagonal and round holes.

Application

Polyfon Mesh™ is ideal for office fitouts, retail, hospitality, showrooms.


Composition

Made in NZ, Polyfon Mesh™ is made from a composite of compressed polyester and a fire resistant glass mat facing.

Features & Benefits

- Provides a bold industrial look. Ideal for retro fit or new.
- Available in 40 x 71 mm Diamond, 50 x 50 Square, 75 x 75 Square and 40 x 40 Hexagonal perforations.
- Option of White or Black core with matching surface finish or contrasting surface finish, eg RAL7030 grey.
- Fire Group 1-S. NRC 0.30.
- Global GreenTag Level B, Low VOC material.
- Very light weight for seismic.
- Designed to lay into standard Rondo Donn DX grid systems and mix with other ceiling panel types for design effect.
- 10mm thickness for 600 x 1200mm panels and other optional sizes.
- 10mm or 20mm thickness for 600 x 600mm panels.
- Permits visibility into plenum spaces for security.
- Ideal for passive heat/cooling systems using thermal mass.
- Dimensionally stable and allows good ventilation.
- Manufactured in NZ, short lead times.
- Packaging take back and reuse scheme available (NZ only).

Item #	Size (nominal)*
PM.0606.D4071	10 or 20 x 600 x 600
PM.0612.D4071	10 x 600 x 1200
PM.0606.SQ5075	10 or 20 x 600 x 600
PM.0612.SQ5075	10 x 600 x 1200
PM.0606.SQ75100	10 or 20 x 600 x 600
PM.0606.H4040	10 or 20 x 600 x 600
PM.0612.H4040	10 x 600 x 1200

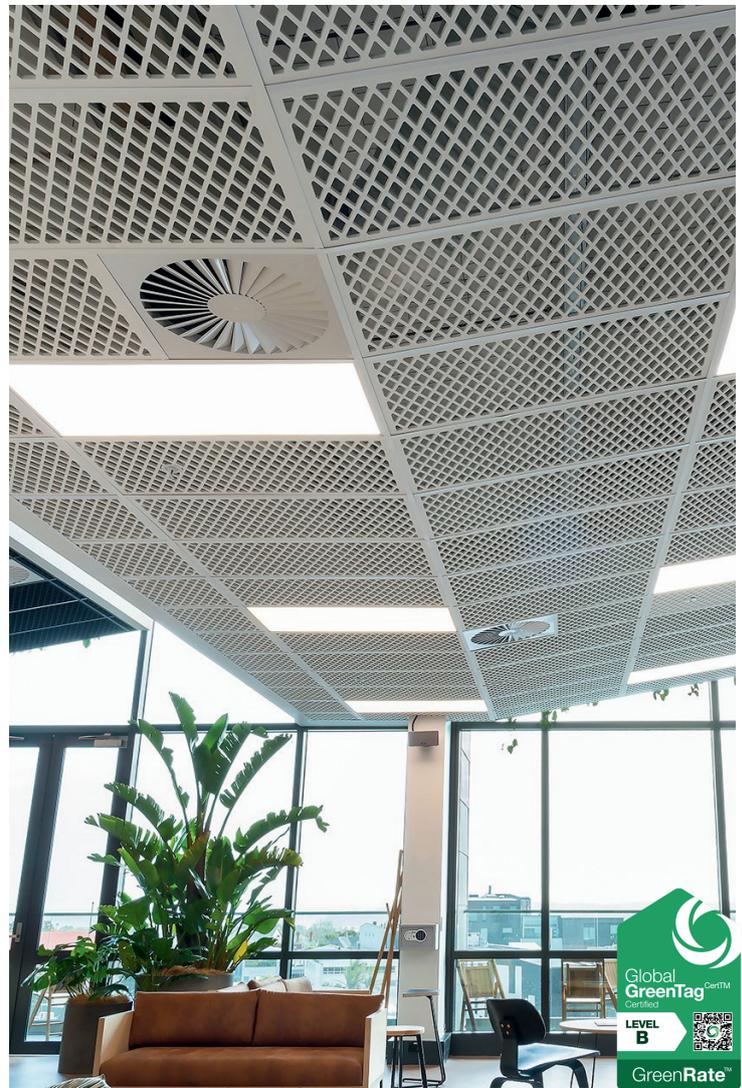

Technical Specifications:

Accessibility:

All panels are demountable and accessible.

Back loading:

All loads shall be independently supported.

Core Colours:

White, Black.

Environmental Impact:

Polyester, no chemical binders or pesticides, tested low VOC's per ASTM D51106(TVOC 0.004 mg/m²/hr, Aldehydes <0.01 ppm, Formaldehyde 0.004 mg), low embodied energy, low transport km's vs imports.

Laminate Finishes:

Polyfon Mesh™ is available in standard white, black and a range of Sonatex™ RAL colours and prints. Refer to online Sonatex finishes charts.

Limitations:

- For interior use only, and not in direct contact with water.
- Not for use with negative air return plenums.
- Maximum humidity/temperature 99% R/H at 45°C.
- Back loading — No overlay loads, M&E services and point loads to be independently supported.

Maintenance:

Clean with vacuum, soft brush or melamine foam 'magic' cleaner.

ISO 9001:2015 Registered Firm No. NZ1014

© 2026 Copyright ASONA Ltd Asona, Polyfon Mesh, Sonatex, Sonaris Triton, Triton Duo are trademarks of Asona Ltd, Donn DX is a trademark of Rondo Building Services Pty Ltd
*All dimensions are nominal. We reserve the right to change specifications.
Patent No. AU2009208100 Patent No. NZ570507
Ref. Polyfon Mesh-26.03

Asona Ltd. Office & Factory
6 Mahunga Drive, Māngere
Bridge, Auckland 2022
New Zealand
NZBN: 9429036035175

New Zealand
T: +64(0)9 525 6575
E: info@asona.co.nz
W: www.asona.co.nz

Australia
T: 1 800 240361
E: info@asona.com.au
W: www.asona.com.au

asona

NZ Building Act

This product is not subject to a warning or ban under Section 26.

NZ Building Code Compliance:

- B2 Durability – Clause B2.3.1 (c) (i): Asona ceiling tiles with only normal maintenance will have a minimum durability of at least 5 years when installed in accordance with; manufacturer’s installation requirements and AS/NZS 2785:2020.
- C3 Fire – Clause C/AS2 4.12.1: Asona Polyfon Mesh has a Fire Material Group Number 1-S by NZBC Building Product Specification Parts 8.5.4 or 8.5.5, tested in accordance with ISO 9705 or ISO 5660. (NCC BCA C1.10 clause 4, spec A2.4 clause 4. Group 1)

Open Area:

48-51%, subject to selected perforation and panel size.

Packaging Take Back Scheme: (NZ only)

Flat pack cartons on site and return to Asona for reuse.

Renew & Reuse Stewardship Program:

Soiled or damaged panels can be resurfaced with new Sonatex or Sonaris laminates for reuse in the ceiling. Helps extend life cycle and reduce construction waste. Register on practical completion.

Sound Absorption Rating:

α_w 0.3; Class D; NRC 0.30 per ASTM C423
ISO 354 E-200.

Optional acoustic backer available to order where high NRC or CAC performance is required.

Eg: laminated to Triton Duo 60 CAC 44, NRC 0.95.

Thermal Resistance:

R 0.45m²/C/W.

Warranty:

15 year limited warranty against manufacturing defects.

Weight:

0.8—1.5 kg/m².

Installation:


Shall not commence until the building is watertight and dry. This product is designed to be mounted into a two-way exposed grid system and installed to manufacturer’s and AS/NZS 2785:2020 Standard’s requirements. Panels are not to support any weight and equipment shall be independently supported. Seismic design may require a suitably qualified engineer. Care shall be taken when handling tiles to avoid damage.

Specification:


Open Cell Ceiling system shall be Asona Polyfon Mesh™ sound absorbing ceiling panel as manufactured by Asona Ltd Tel: 09 525 6575, info@asona.co.nz, Perforation (#_), size (L) x (L) mm, (10) (20) mm thick, fire Group 1-S, NRC 0.30, core colour shall be: (white) (black), Global GreenTag Level B, finish shall be Sonatex acoustic laminate in standard (white) (black) (grey RAL7030)(other). Optional acoustic backer panel shall be (Triton_) (Triton Duo_). Panels shall be installed on Rondo Donn DX® two way exposed grid.

Contractor shall flat pack packaging and return to Asona for reuse and register the ceiling with Asona Renew and Reuse product stewardship program on practical completion.


(Asona ceiling Masterspec 5311AS specification available).

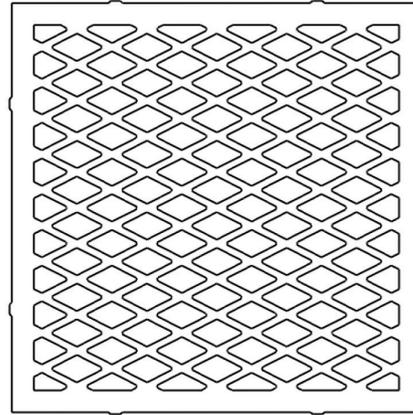


#D4071,
40 x 71 mm, Diamond
Mesh Perforation
Panel sizes:
600 x 600 mm
600 x 1200 mm
Optional:
300 x 1200 mm
500 x 1500 mm

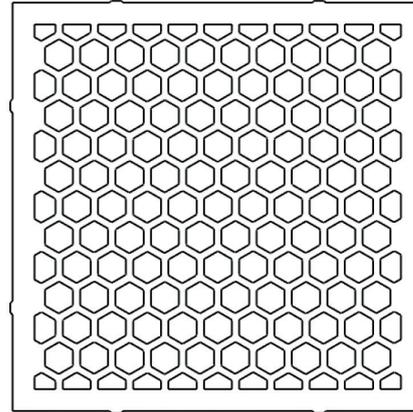

#H4040
40 x 40 mm,
Hexagonal Mesh
Perforation
Panel sizes:
600 x 600 mm
600 x 1200 mm
Optional:
300 x 1200 mm

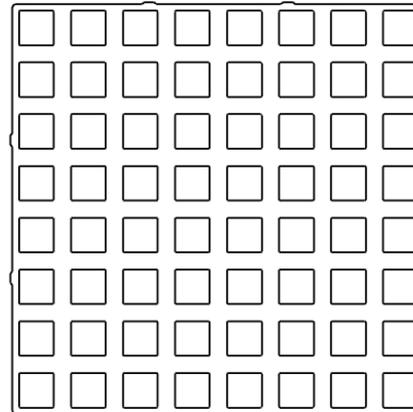


#SQ5075
50 x 50 mm, Square
Mesh Perforation
Panel sizes:
600 x 600 mm
600 x 1200 mm

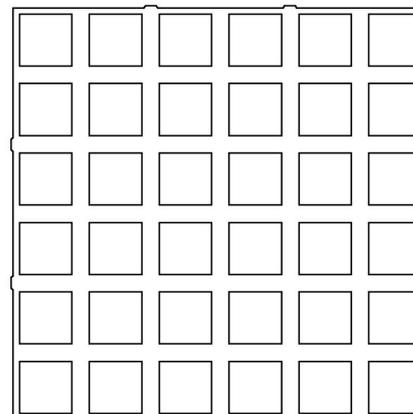


#SQ75100
75 x 75 mm, Square
Mesh Perforation
Panel sizes:
600 x 600 mm




Additional Polyfon Mesh Perforations

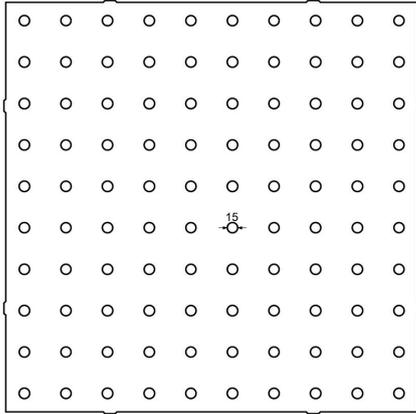


#P15-60,
15mm Ø perf @ 60mm
centres Hole Mesh
Perforation
Panel sizes:
600 x 600 mm
600 x 1200 mm

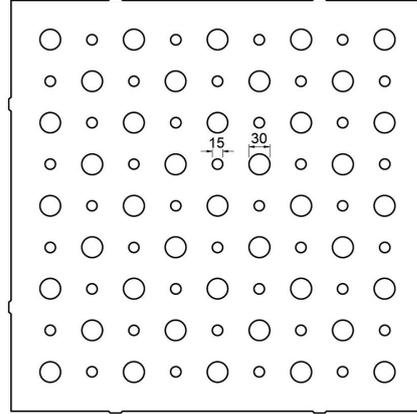


#P15/30-60,
15mm & 30mm Ø perfs
@ 60mm centres Hole
Mesh Perforation
Panel sizes:
600 x 600 mm
600 x 1200 mm

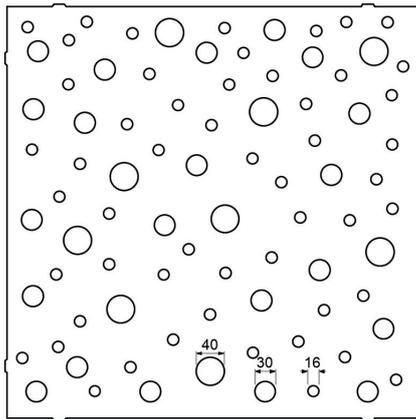


#P16/30/40,
16, 30 & 40mm Ø perfs
@ random centres
Hole Mesh Perforation
Panel sizes:
600 x 600 mm
600 x 1200 mm

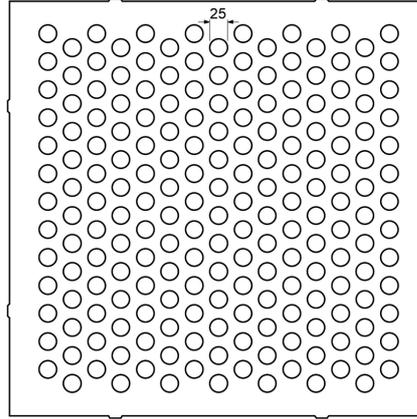


#P25-40D,
25mm Ø perfs @ 40mm
centres, diagonal
pattern Hole Mesh
Perforation
Panel sizes:
600 x 600 mm
600 x 1200 mm

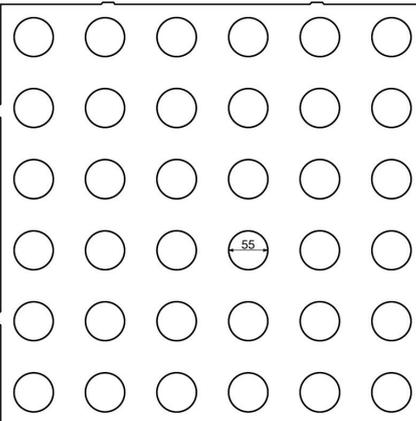


#P55-100,
55mm Ø perf @
100mm centres Hole
Mesh Perforation
Panel sizes:
600 x 600 mm
600 x 1200 mm

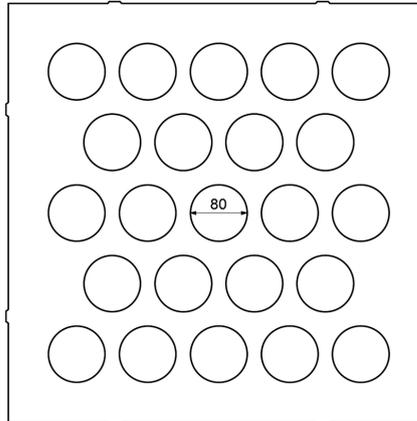

#P80-128D,
80mm Ø perfs @
128mm centres,
diagonal pattern Hole
Mesh Perforation
Panel sizes:
600 x 1200 mm

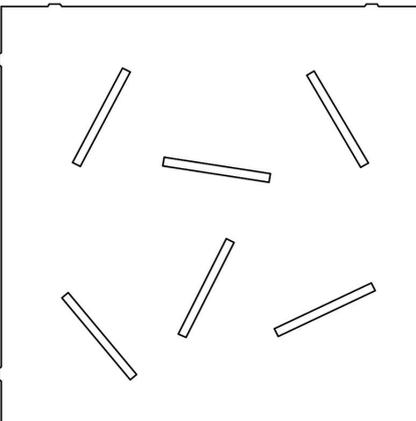

#Rslot,
12mm x 150mm
random Slot Mesh
Perforation
Panel sizes:
600 x 600 mm
600 x 1200 mm

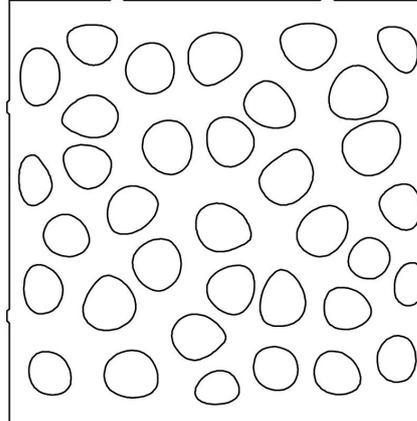

#Pebble,
random Pebble Mesh
Perforation
Panel sizes:
600 x 600 mm

